



LOGO	REV	Date	Changes


Front View

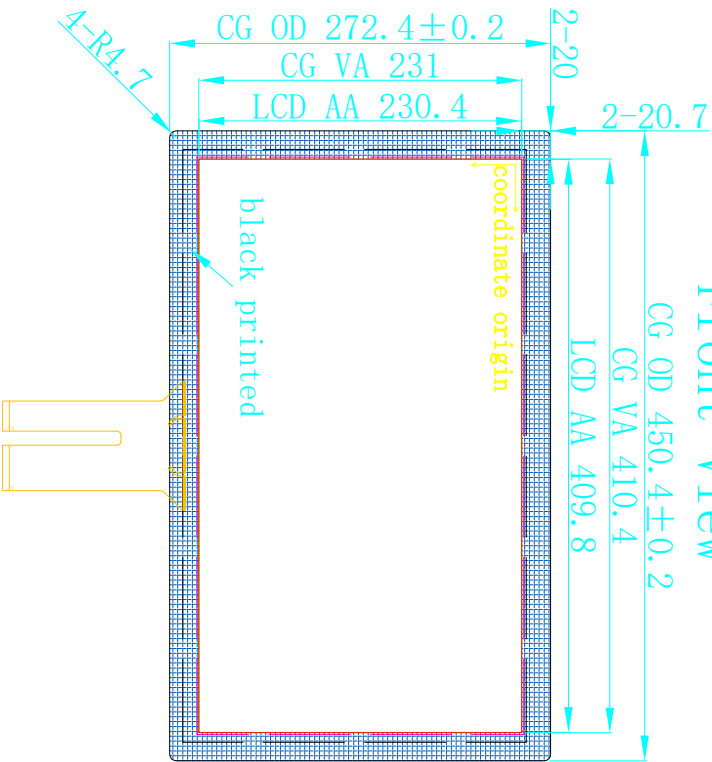

Side View

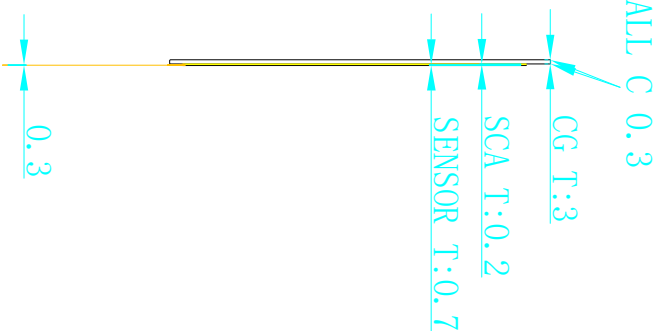

Back View

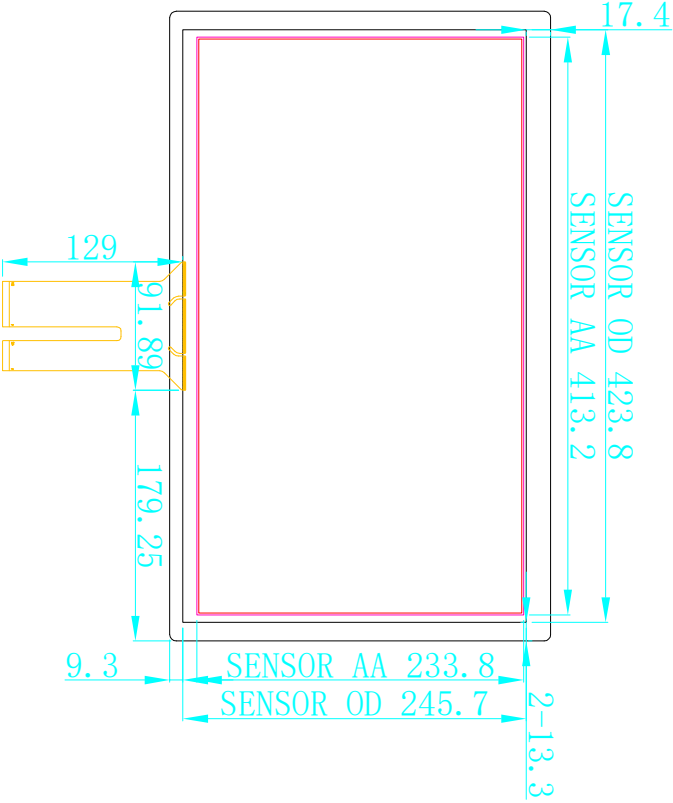

product overlay diagram

TOP

Cover glass T=3.0mm
SCA T=0.2mm
Tx layer ITO 100±20Ω
sensor glass T=0.7mm
Rx layer ITO 100±20Ω

USB cable




BOTTOM

Technical Parameters

1. interface:	USB type-A	7. Square resistance	tx/rx 80~120Ω/□
2. Cable length:	1000 mm	8. transmittance:	≥85%
3. controller:	ILI2510	9. surface hardness:	≥7H
4. tx/rx channels:	tx 34/rx 60	10. working Temp:	-10℃~+60℃, ≤85%RH
5. touch point:	10 point	11. storage Temp:	-20℃~+70℃, ≤85%RH
6. input voltage:	5±0.5 V	12. unmarked tolerance:	±0.5mm

Control Board

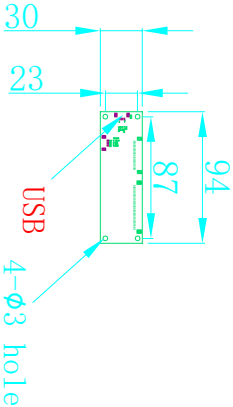

Shenzhenjiaruituo technology Co.,Ltd

Description	18.5 inch P-CAP	Scale	1:1
model	RC185G1-CG 94 YC61	Unit	mm
Customer		Sheet	1/1
Customer Model		Ver	A0
Drawn	Li Rixiong	Check	
Date		Approve	

