



LOGO	REV	Date	Changes


Front View

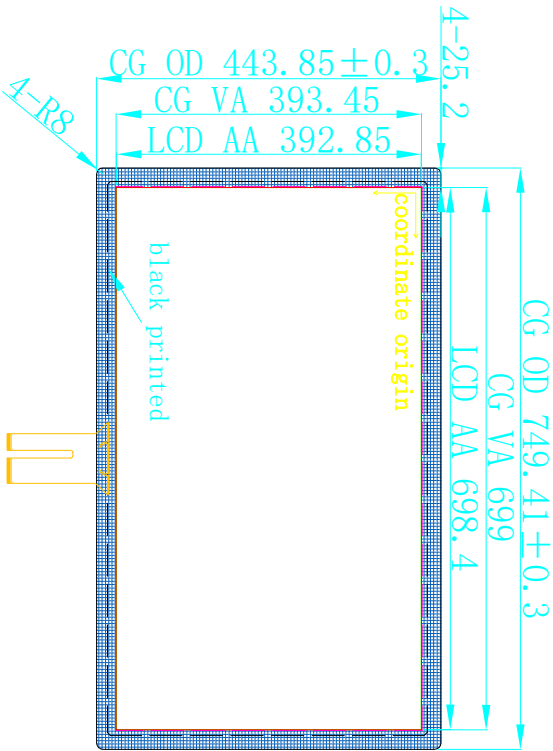

Side View

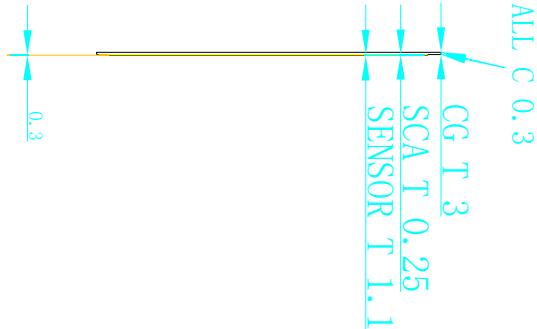

Back View

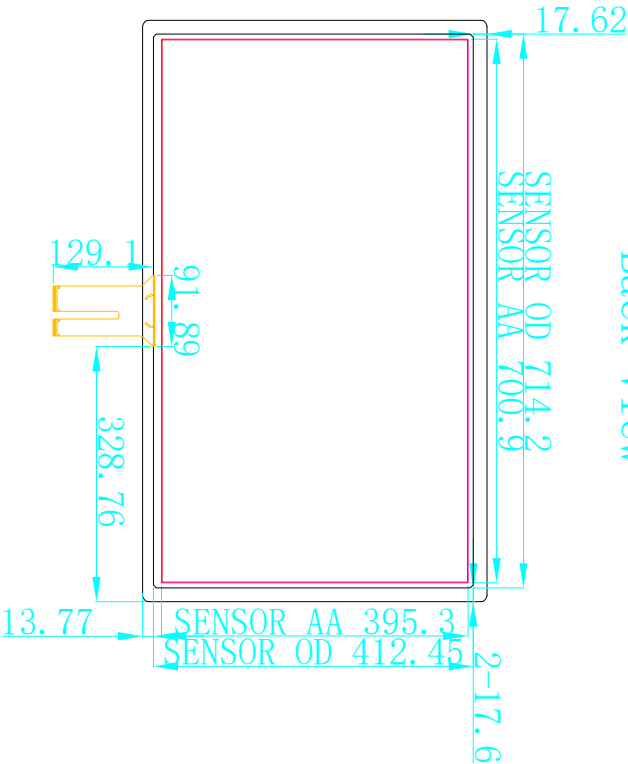

product overlay diagram

TOP


Cover glass T=3.0mm
SCA T=0.25mm
Tx layer ITO $75 \pm 15\Omega$
sensor glass T=1.1mm
Rx layer ITO $75 \pm 15\Omega$

USB cable



BOTTOM

Control Board



Technical Parameters

1. interface:	USB type-A	7. Square resistance	tx/rx 60~90Ω/□
2. Cable length:	1000 mm	8. transmittance:	≥83%
3. controller:	IL12510	9. surface hardness:	≥7H
4. tx/rx channels:	tx 34/rx 60	10. working Temp:	-10℃~+60℃, ≤85%RH
5. touch point:	10 point	11. storage Temp:	-20℃~+70℃, ≤85%RH
6. input voltage:	5±0.5 V	12. unmarked tolerance:	±0.5mm

Shenzheniarutuo technology Co.,Ltd

Description	32 inch P-CAP	Scale	1:1
model	RC320G1-CG 94	Unit	mm
Customer		Sheet	1/1
Customer Model		Ver	A0
Drawn	Li Rixiong	Check	
Date		Approve	

